

Design & Production of Sanitation for Coach and Railway

Toilet cabin type LBK Variable toilet cabin for the middle entry, as a rear toilet as well as for special demands







The complete cabin consists of variable parts made of fibreglass, available with a fixed mounted fibreglass or replaceable septic tank unit optionally made of polyethylene. Furthermore, the LBK is offered with a robust vacuum sanitary system that can be easily installed within the ground area of the roomy cabin.

available with:

- chemical flushing (CC)
- fresh water flushing (WC)
- combined fresh water and chemical flushing version (WC / CC)

main dimensions:

 $(I \times w \times h)$

net weight:

1.000 x 1.000 x 2.000 mm; the height is variable

approximately 100 kg up to 110 kg (full equipped & ready for

connexion, but with empty tanks)

supplementary equipment:


fresh water tank, electrical heating, 12 V DC and 220 V AC air compressor









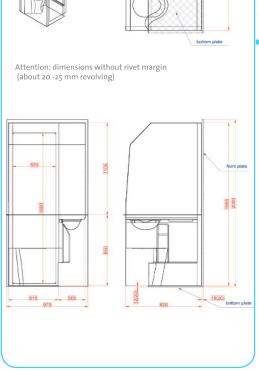

WWW. GIONG